


# RADIA V60



## UNCOOLED SCIENTIFIC INFRARED CAMERAS

### KEY FEATURES

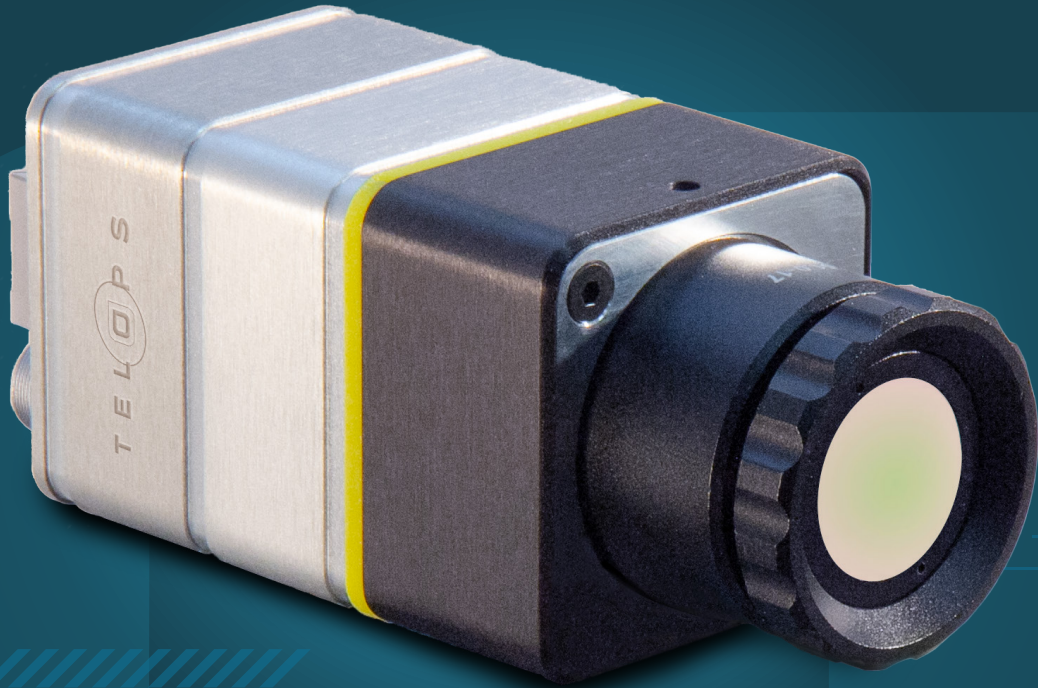

**LOW SIZE, WEIGHT,  
AND POWER (SWAP)**



**PERMANENT RADIOMETRIC  
CALIBRATION**



**USER-SWAPPABLE LENS**




**GigE ETHERNET DATA TRANSFER**


The Radia V60 is an uncooled, small form-factor thermal infrared camera designed to provide high-quality imagery and reliable scientific data. Engineered with simplicity and ease-of-use in mind, the Radia V60 combines real-time image acquisition capability with a scientific-quality permanent radiometric calibration. When combined with Telops ReveallR camera control software, the Radia V60 delivers high-impact calibrated thermal imagery to users of all levels of expertise.



# RADIA V60

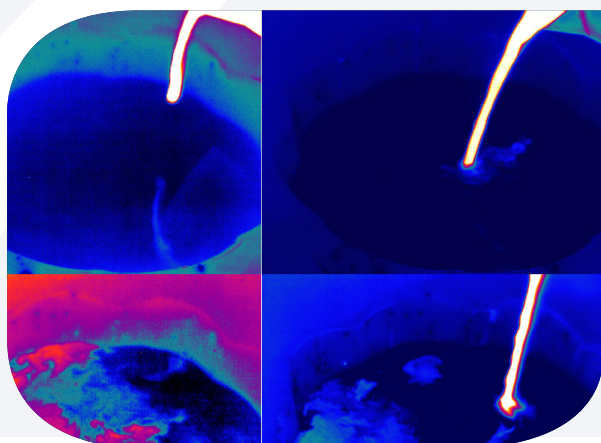

High-sensitivity General Purpose Infrared Thermography

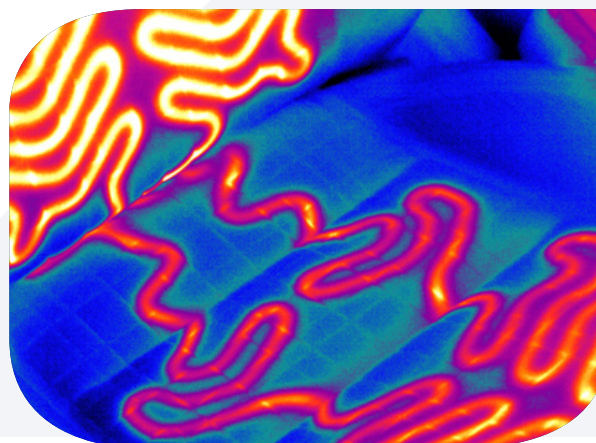

Automotive Systems Functionality Testing

## SPECIFICATIONS

Detector Type	Uncooled Microbolometer
Detector Format	640 x 480 pixels
Spectral Range	8.0 – 14.0 $\mu\text{m}$
Detector Pitch	12 $\mu\text{m}$
Aperture Size	F/1
Maximum Frame Rate	60 Hz
Max. Frame Rate (Subwindow)	-
Typical NETD	50 mK
Standard Calibration Ranges	High sensitivity thermography: 10 °C to 40 °C Standard thermography: -20 °C to 120 °C High temperature thermography: 50 °C to 400 °C
Data Output Types	RAW, NUC, RT, IBR, IBI
Data Transfer	GigE ethernet
Lens Mount	Threaded, user-swappable
Included Lens	Standard: 14 mm EFL FOV: 30.7° x 23.2°
Lens Options	Wide angle: 7.5 mm EFL / FOV: 54.2° x 41.9° Telephoto: 25 mm EFL / FOV: 17.5° x 13.1°
Size	45 x 45 x 75 mm
Weight	250 grams
Operational Temperature	-40 °C to 70 °C (Thermography: 10 °C to 50 °C)
Storage Temperature	-40 °C to 85 °C

[sales@telops.com](mailto:sales@telops.com)



[telops.com](http://telops.com)

**EXOSENS**  
REVEAL THE INVISIBLE